

NELSON ANGLED SPHERE BUBBLE PENDANT

PRODUCT FACT SHEET



NELSON ANGLED SPHERE BUBBLE PENDANT


DESIGN FOR HERMAN MILLER, AVAILABLE FROM HAY, 1947

Designed by George Nelson in 1947, the Nelson Bubble Pendant Lamp series comprises a range of pendant lighting solutions with varying spherical silhouettes. Inspired by a set of silk-covered Swedish hanging lamps, the lamps' organic shapes appear to delicately float overhead, offering a soft and atmospheric light. Available in Ball, Pear, Apple, Cigar, Saucer, Lantern, Propeller, Roll, and Angled Sphere variants in different sizes.


HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A family of refined pendants available in multiple variants and sizes.
- The organic shape features gently sloping angles, with the wide surface area creating a soft, diffused light.
- CE approved.
- Designed for use with a replaceable standard retro fit LED dimmable bulb.
- Suitable for both private and office environments.


DIMENSIONS



SMALL
DIAMETER Ø35,5
HEIGHT 24 CM



MEDIUM
DIAMETER Ø49,5
HEIGHT 38,5 CM

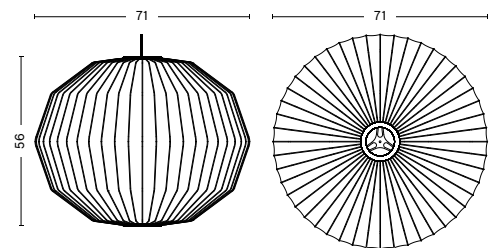

LARGE
DIAMETER Ø71
HEIGHT 56 CM

MATERIALS

SHADE

Webbing polymer.

FRAME TOP & BOTTOM RING

Coated and brushed metal and nickel.

CORD

White PVC insulation.

All Bubble Lamp models have a steel-wire skeleton on the interior which is spray coated with the translucent plastic polymer resulting in a lamp that is both opaque and transparent as it glows.

COLOUR & FINISH

Please note that the colours are indicative.



OFF WHITE

NELSON ANGLED SPHERE BUBBLE PENDANT SMALL

TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	POWER (WATTS)	DIMMABLE	POWER SUPPLY	CORD LENGTH	SWITCH
LED E27 (A15)	5-8W	Yes**	220-240V AC at 50/60Hz	300 cm	No

*Bulb not included


**If used in conjunction with a wall mounted dimmer and suitable LED bulb. Hardwiring required.

TEST SPECIFICATIONS*

FLUX (LUMENS)	CCT (KELVIN) & CRI (1-100)
500-800lm	The levels will vary depending on the type of bulb used in the lamp.

*Photometrics and the specification shown is taken using the recommended LED bulbs fitted in the production luminaire.

PHOTOMETRICS

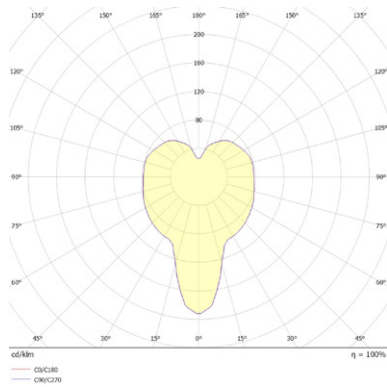

NELSON ANGLED SPHERE BUBBLE PENDANT MEDIUM

TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	POWER (WATTS)	DIMMABLE	POWER SUPPLY	CORD LENGTH	SWITCH
LED E27 (A19)	10-13W	Yes**	220-240V AC at 50/60Hz	300 cm	No

*Bulb not included


**If used in conjunction with a wall mounted dimmer and suitable LED bulb. Hardwiring required.

TEST SPECIFICATIONS*

FLUX (LUMENS)	CCT (KELVIN) & CRI (1-100)
1000-1500lm	The levels will vary depending on the type of bulb used in the lamp.

*Photometrics and the specification shown is taken using the recommended LED bulbs fitted in the production luminaire.

PHOTOMETRICS

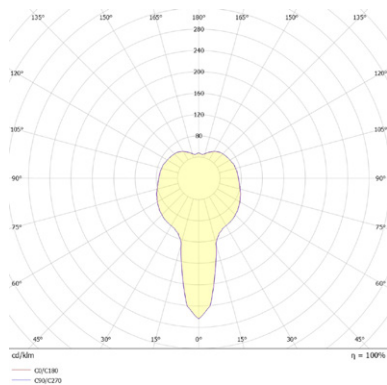

NELSON ANGLED SPHERE BUBBLE PENDANT LARGE

TECHNICAL SPECIFICATIONS

LIGHT SOURCE*	POWER (WATTS)	DIMMABLE	POWER SUPPLY	CORD LENGTH	SWITCH
LED E27 (A19)	10-13W	Yes**	220-240V AC at 50/60Hz	300 cm	No

*Bulb not included


**If used in conjunction with a wall mounted dimmer and suitable LED bulb. Bulb not included. Hardwiring required.

TEST SPECIFICATIONS*

FLUX (LUMENS)	CCT (KELVIN) & CRI (1-100)
1000-1500lm	The levels will vary depending on the type of bulb used in the lamp.

*Photometrics and the specification shown is taken using the recommended LED bulbs fitted in the production luminaire.

PHOTOMETRICS

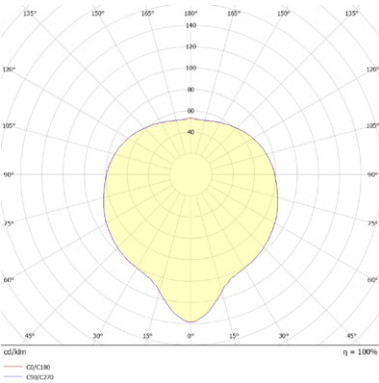

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

LED  IP20  

Tested according to the following european EN IEC standards which relate specifically to electrical lighting products including

- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)

COUNTRY OF ORIGIN

USA

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.

LINK TO DIGITAL LIBRARY